


INSTALLATION INSTRUCTIONS

WS-K-H2-V : Full Vented Windshield


- ⚙ Please look through and read these instructions BEFORE starting so you understand what processes you'll be doing, and possible extra tools you may need.
- ⚙ Do Not discard product packaging until installation is complete and functioning properly.



Vented Windshield

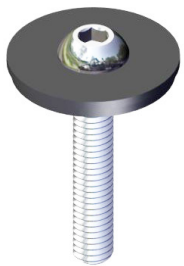


**M6x35
Button Sealing
Screw
(2pcs)**



**3/4x3/8
LDPE
Spacer
(2pcs)**



**M6
Nylock
Nut
(2pcs)**



**M6
Flat
Washer
(2pcs)**



**Velcro Windshield
Straps (4pcs)**

1. The first thing you need to do is **Remove** the **Roof Bolt** in each front left and right corners of the roof. This is so you can lift it up giving access to install the Windshield. See **Fig.1**.

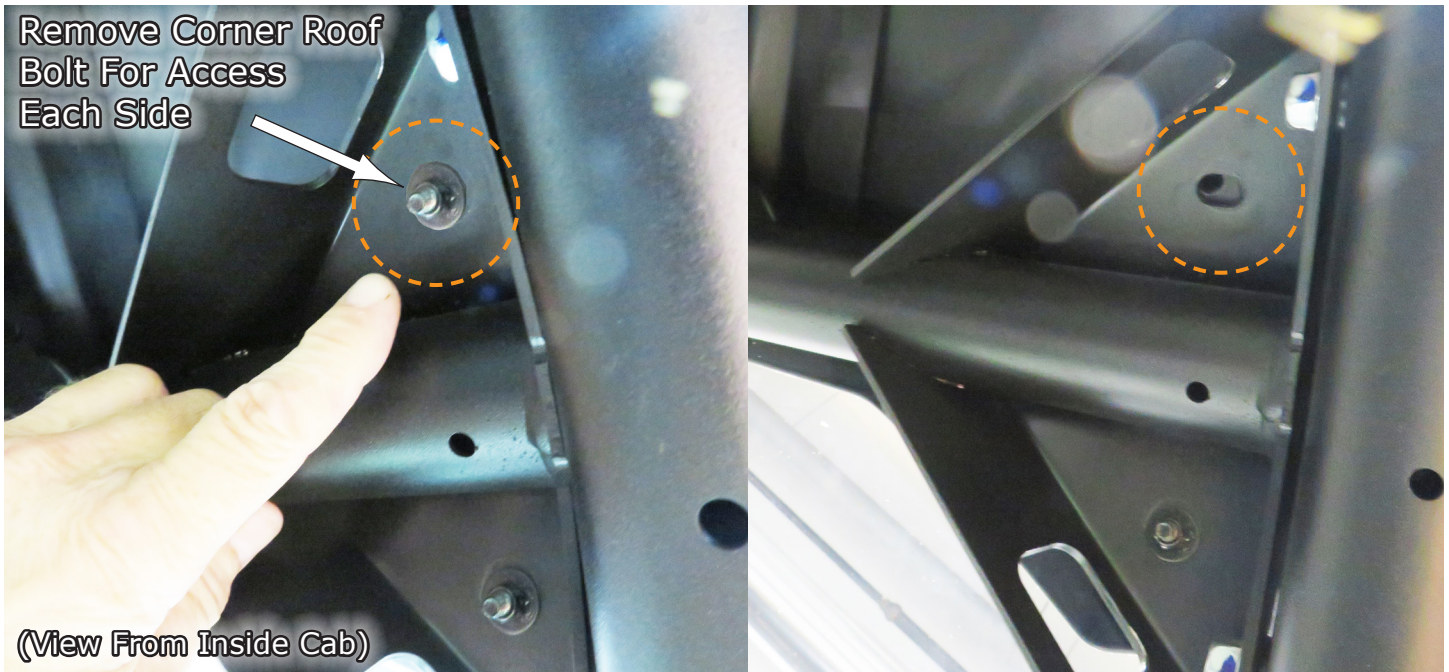


Fig.1

2. Now **Raise** the **Corner** of the Roof to give room for the Windshield to fit up under it. We used a rubber block, but you can use whatever is available that you have. See **Fig.2**.



Fig.2



3. Now place the Windshield on the vehicle and up under the roof line and **Install the LDPE Spacer** from your kit between the Windshield and the window frame as shown in **Fig.3**.

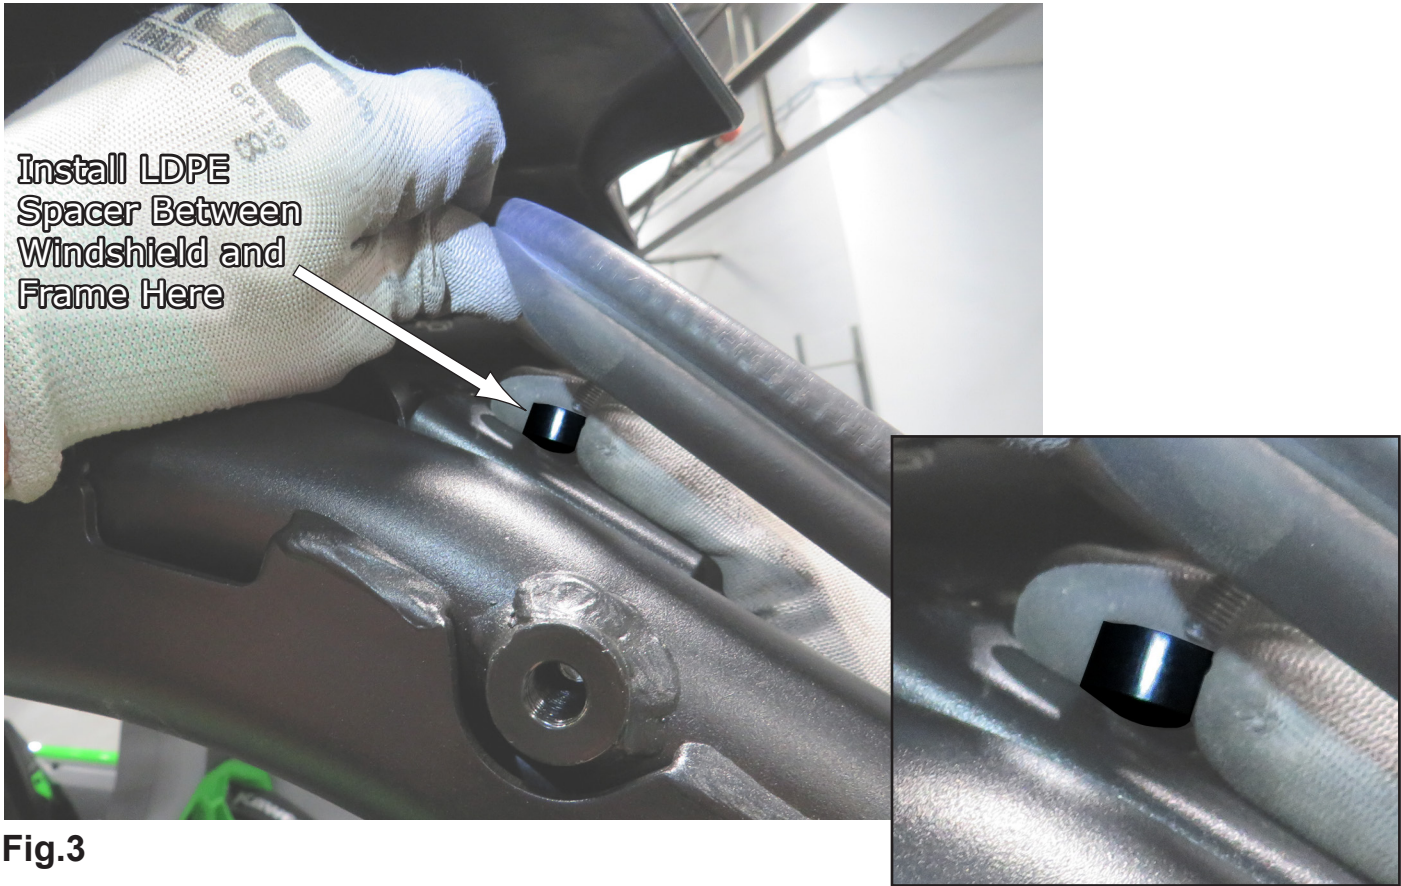


Fig.3

4. Next, **Install the M6x35 Button Sealing Screw** through the Windshield, Spacer and vehicle Frame as shown in **Fig.4a**. Then **Install the M6 Flat Washer & M6 Nylock Nut** provided in your kit on the inside as shown in **Fig.4b**. *Be sure to get both screws in place first (both left & right sides), then go back and tighten them both down secure.*



Fig.4a



Fig.4b

5. After the screws are in place, you can now **Install the Velcro Windshield Straps**. These will feed from the inside of the vehicle up thru the windshield, up thru the clamp end, and back down thru the windshield. Then pull tight and wrap to secure as shown in **Fig.5a-e**. Repeat this for all Four (4) locations of the windshield.



Fig.5a



Fig.5b



Fig.5c



Fig.5d



6. Once the Straps are installed and tight, now go back and replace the Roof Bolts you removed previously and tighten them secure.



Liability Statement

SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warrantied if item was not installed properly, misused, or modified.

Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you.

The Buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings and/ or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV® harmless from any violation thereof.

If you have any problems/questions on this kit, contact us by email at [Superatv.com](mailto:sales@superatv.com).

Need help with your installation?



sales@superatv.com



www.superatv.com



1-855-743-3427



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

*Thank You
For Choosing*



Like SuperATV on Facebook to keep up to date on new products!